

Confidential


[See SRL report C/23394/T06 for full details](#)

The Laboratory Measurement of Random Incidence Sound Absorption to BS EN ISO 354:2003

Client: Rockfon
Test Date: 09/06/2016
Empty Room: Temperature: 18.6 °C Humidity: 62 %RH Pressure: 1015 mbar
Room with Sample: Temperature: 18.8 °C Humidity: 63 %RH Pressure: 1015 mbar
Sample Description: Blanka A15/24 600x600x20 (CIG 90)

Mounting Method: E-50
Sample Area: 12.7 m²
Chamber Volume: 300 m³

Test 55				
Freq Hz	T1 sec	T2 sec	Absorp Coeff	Practical Absorp Coeff #
50*	4.64	4.69	-0.01	
63*	3.90	4.08	-0.04	n/a
80*	5.28	5.02	0.04	
100	7.47	6.25	0.10	
125	7.31	5.95	0.12	0.15
160	7.18	5.49	0.16	
200	7.53	4.78	0.29	
250	8.00	4.16	0.44	0.45
315	7.79	3.57	0.58	
400	7.14	2.96	0.75	
500	6.11	2.45	0.93	0.90
630	5.62	2.22	1.04	
800	5.84	2.22	1.06	
1000	6.21	2.25	1.08	1.00
1250	5.98	2.19	1.10	
1600	5.49	2.18	1.05	
2000	5.04	2.14	1.03	1.00
2500	4.55	2.09	0.99	
3150	3.88	1.90	1.03	
4000	3.16	1.72	1.02	1.00
5000	2.55	1.51	1.05	
6300*	1.83	1.22	1.07	
8000*	1.51	1.08	1.05	n/a
10000*	1.05	0.83	1.03	

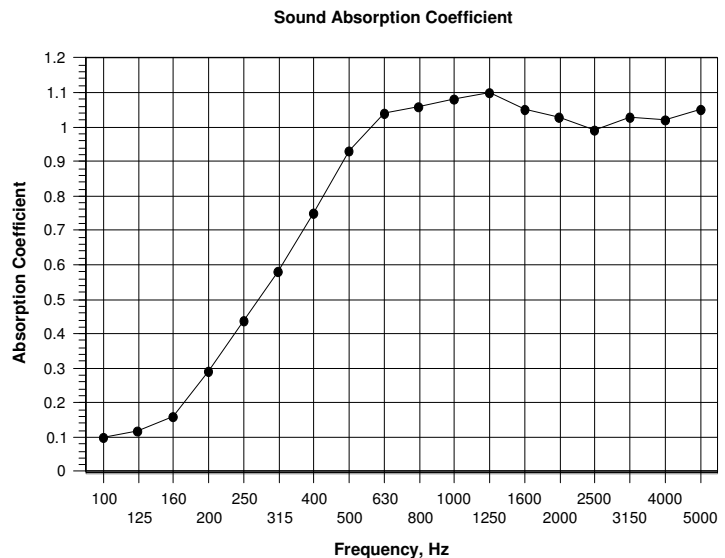

α_w 0.75(MH)
Class C
 Calculated to EN ISO 11654:1997
NRC 0.85
 Calculated to ASTM C 423-01
 * Denotes frequencies outside the range covered by BS EN ISO 354:2003
 T1, empty room reverberation time
 T2, room reverberation time with sample

Practical absorption coefficient, BS EN ISO 11654:1997

v4.3



Allen Smalls
Quality Manager



Richard Critchlow
Deputy Technical Manager